

NC2-MRG-T50P-1

2.4mm Male Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~50GHz
VSWR:	1.35 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance:	50Ω

Mechanical



RF Connector:	2.4mm Male Right Angle
Mating Cable:	NT50P
Outer Conductor:	303F stainless steel

How To Order

NC2-MRG-T50P-1

Customization is available upon request.

Outline Drawings

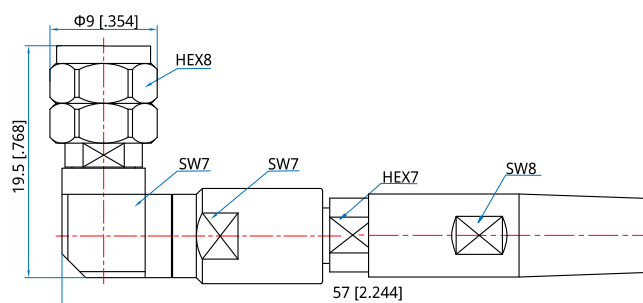

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]