

NC3-FG-A500-2
3.5mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω



Mechanical

RF Connector:	3.5mm Female
Mating Cable:	NA480, NA500, NG500
Outer Conductor:	303F stainless steel

How To Order
NC3-FG-A500-2

Customization is available upon request.

Outline Drawings

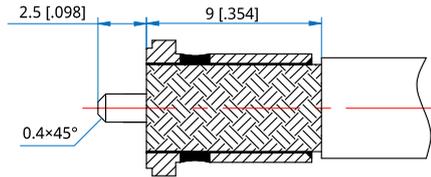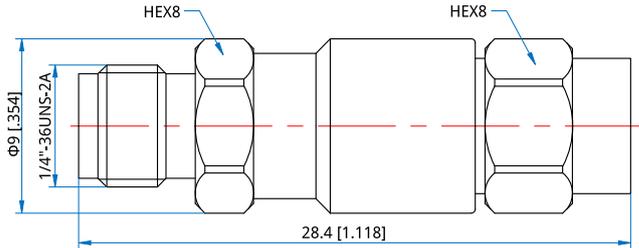

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

