

NC3-FG-T50P-1

3.5mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

| | |
|--------------------------|--------------|
| Frequency: | DC~26.5GHz |
| VSWR: | 1.25 max. |
| Impedance of Dielectric: | 5000MΩ min. |
| Voltage Withstand: | 1000V DC min |
| Impedance: | 50Ω |

Mechanical


| | |
|------------------|----------------------|
| RF Connector: | 3.5mm Female |
| Mating Cable: | NT50P |
| Outer Conductor: | 303F stainless steel |

How To Order

NC3-FG-T50P-1

Customization is available upon request.

Outline Drawings

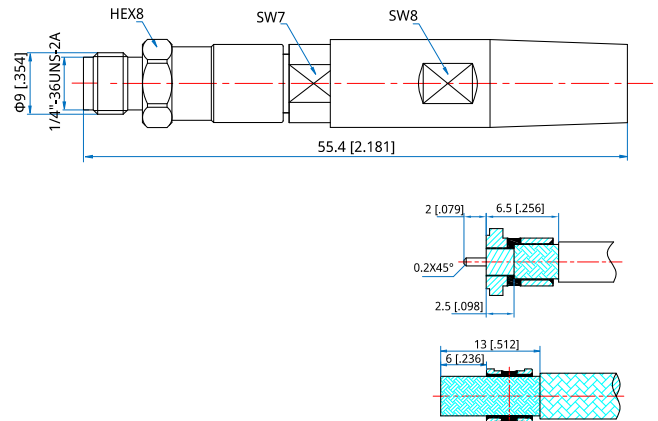

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]