

NC3-FG-Z360-1

3.5mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min
Impedance:	50Ω

Mechanical



RF Connector:	3.5mm Female
Mating Cable:	NZ360
Outer Conductor:	303F stainless steel

How To Order

NC3-FG-Z360-1

Customization is available upon request.

Outline Drawings

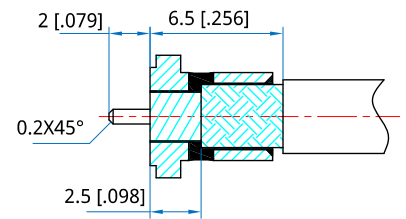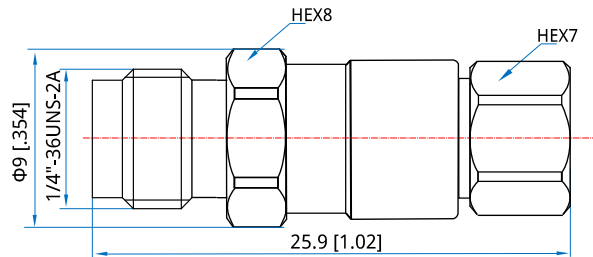

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]