

NC4-FHCB-RG142-1

4.3-10 Female, Bulk Head, Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics


Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Voltage Withstand:	1500V DC
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω

Mechanical

RF Connector:	4.3-10 female
Mating Cable:	RG142
Outer Conductor:	Nickel plated brass
Inner Conductor:	Gold plated phosphor copper or Gold plated brass
Dielectric:	PTFE
Gasket:	Silicone rubber

Outline Drawings

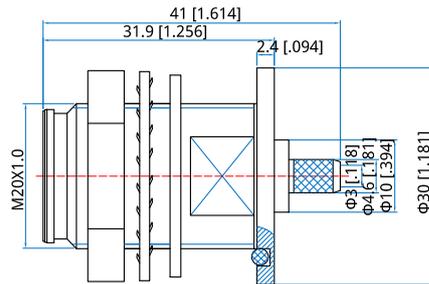

Unit: mm [in]
Tolerance: ±0.5mm [±0.02in]

How To Order

NC4-FHCB-RG142-1

Customization is available upon request.

