

## NCB-MB-141-1 BNC Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



### Electrical

|                          |             |
|--------------------------|-------------|
| Frequency:               | DC ~ 6GHz   |
| VSWR:                    | 1.3 max.    |
| Impedance of Dielectric: | 5000MΩ min. |
| Voltage Withstand:       | 1000V DC    |
| Impedance:               | 50Ω         |


### Mechanical

|                  |                                    |
|------------------|------------------------------------|
| RF Connector:    | BNC Male                           |
| Mating Cable:    | NH280, ND086, NE086, RG316, RG316D |
| Outer Conductor: | Ternary alloy plated brass         |
| Dielectric:      | PTFE                               |
| Inner Conductor: | Gold plated brass                  |

### How To Order NCB-MB-141-1

Customization is available upon request.

### Outline Drawings

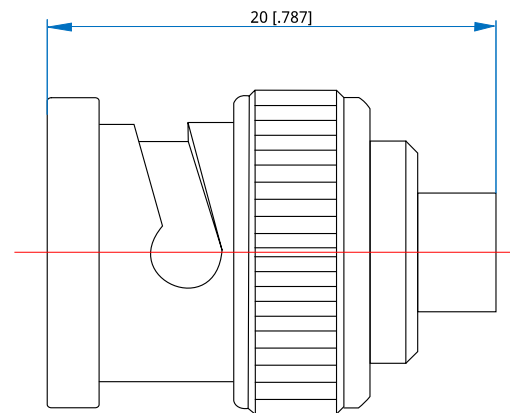

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]