

NCD-MB-086-1

SMB Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics


Electrical

Frequency:	DC-6GHz
VSWR:	1.2 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC
Impedance:	50Ω

Mechanical

RF Connector:	SMB Male
Mating Cable:	NH280, ND086, NE086, RG316, RG316D
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Innerr Conductor:	Gold plated brass

Outline Drawings

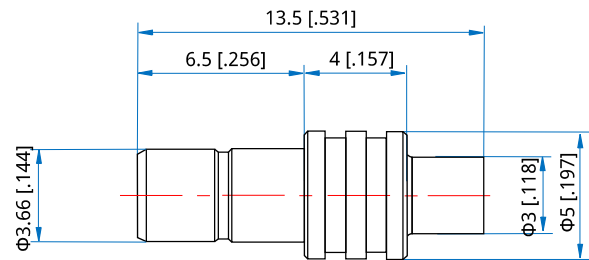

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

NCD-MB-086-1

Customization is available upon request.