

NCG-MRB-047-1

SSMP Male Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~18GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	500V DC min
Impedance:	50 Ω

Mechanical



RF Connector:	SSMP Male Right Angle
Mating Cable:	NA150, NH160, ND047, NE047
Outer Conductor:	Beryllium copper

How To Order

NCG-MRB-047-1

Customization is available upon request.

Outline Drawings

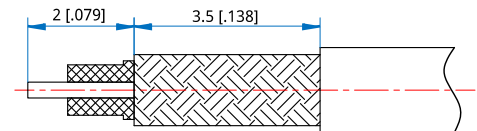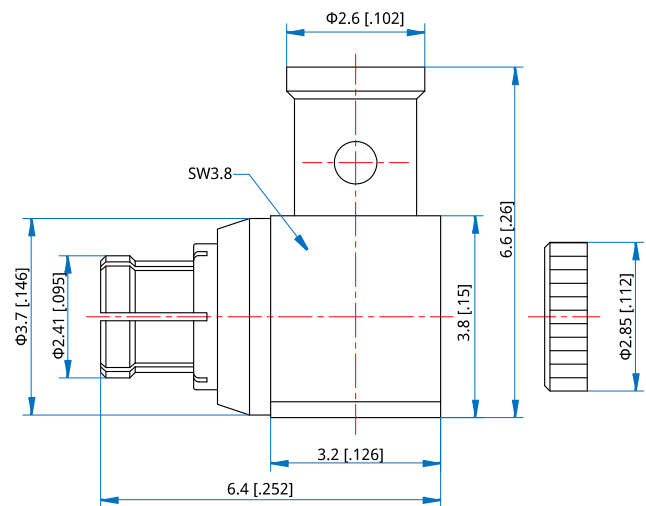

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]