

**NCK-FB-086-1**  
2.92mm Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



**Electrical**

Frequency:	DC~40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750V DC min
Impedance:	50Ω

**Mechanical**



RF Connector:	2.92mm Female
Mating Cable:	NH280, ND086, NE086, RG316, RG316D
Outer Conductor:	Brass

**How To Order**

**NCK-FB-086-1**

Customization is available upon request.

**Outline Drawings**

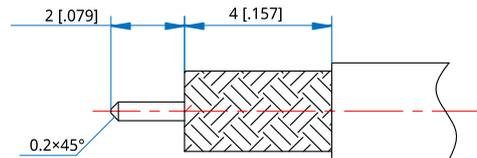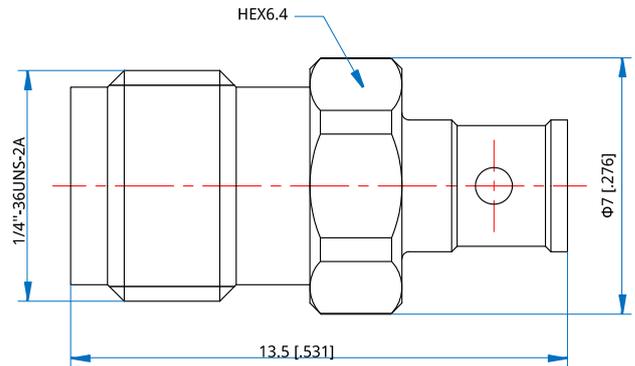

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

