

NCK-FRG-T50-1

2.92mm Female Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750V DC min
Impedance:	50Ω

Mechanical


RF Connector:	2.92mm Female Right Angle
Mating Cable:	NT50
Outer Conductor:	303F stainless steel

How To Order

NCK-FRG-T50-1

Customization is available upon request.

Outline Drawings

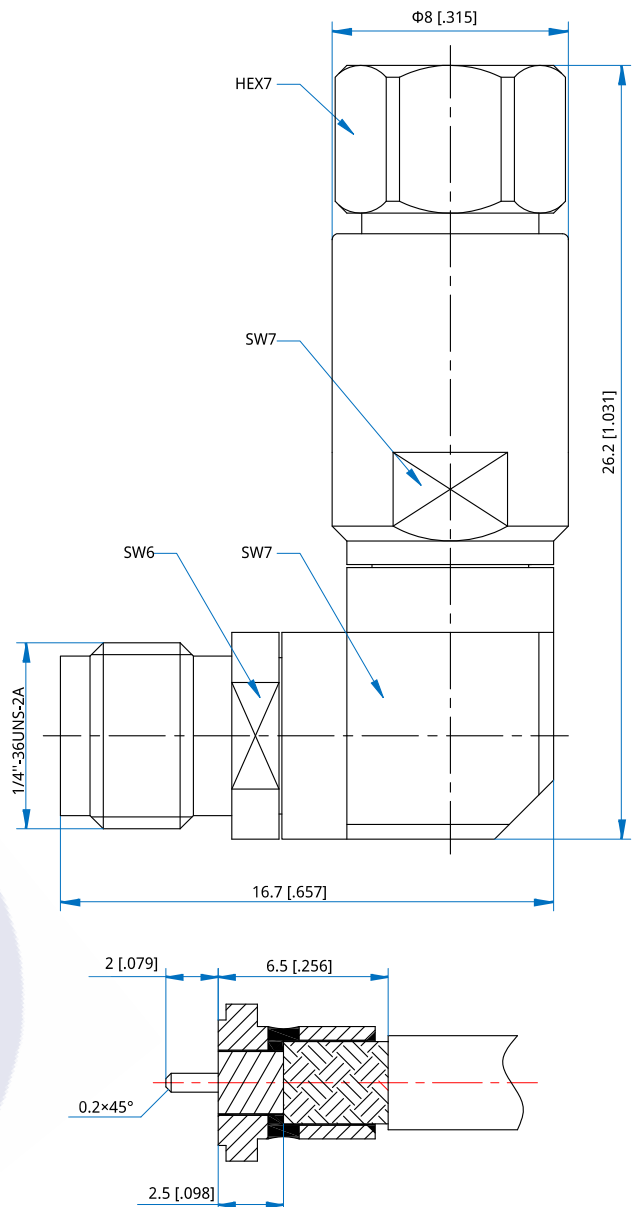

Unit: mm [in]
Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]