

NCK-MG-141-2

2.92mm Male

Features:

* Low VSWR

Applications:

* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~40GHz
VSWR: 1.35 max.(DC~26.5GHz)
Impedance: 50Ω

Mechanical

RF Connector: 2.92mm Male
Mating Cable: 141, NA400, NH400, RG-402
Inner Conductor: Gold Plated Beryllium Copper
Dielectric: PEEK
Body: Stainless Steel / Passivated
Outer Conductor: Stainless Steel / Passivated

Environmental


Temperature: -40 155 °C

How To Order

NCK-MG-141-2

Customization is available upon request.


Outline Drawings

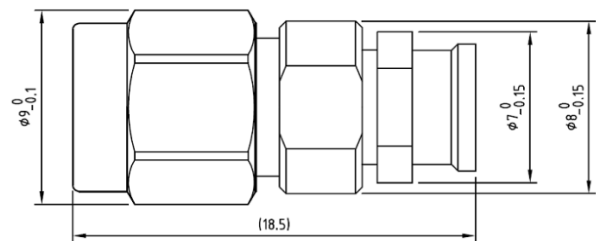

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Stripping Reference



Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]