

NCK-MG-A360-1

2.92mm Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~40GHz
VSWR: 1.3 max.
Impedance: 50Ω

Mechanical


RF Connector: 2.92mm Male
Mating Cable: NA360
Outer Conductor: Passivated Stainless Steel
Inner Conductor: Gold Plated Beryllium Copper

How To Order

NCK-MG-A360-1


Customization is available upon request.

Outline Drawings

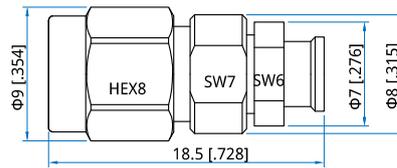

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

Stripping Reference



Unit: mm [in]
Tolerance: ±0.1mm [±0.004in]

