

NCK-MG-A400-1

2.92mm Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC ~ 40GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000M Ω min.
Voltage Withstand:	1000V DC min.
Impedance:	50 Ω

Mechanical


RF Connector:	2.92mm Male
Mating Cable:	NA400
Body:	303F stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium

How To Order

NCK-MG-A400-1

Customization is available upon request.

Outline Drawings

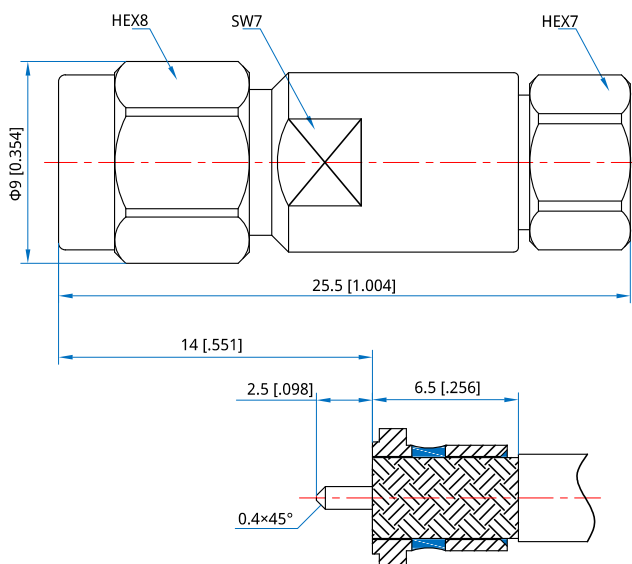

Unit: mm [in]

Tolerance: ± 0.2 mm [± 0.008 in]