

# NCK-MG-A500-1

## 2.92mm Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency: DC~26.5GHz  
VSWR: 1.3 max.  
Impedance: 50Ω

### Mechanical



RF Connector: 2.92mm male  
Mating Cable: NA480, NA500, NG500  
Outer Conductor: Passivated stainless steel  
Inner Conductor: Gold plated beryllium copper

### How To Order

**NCK-MG-A500-1**

Customization is available upon request.

### Outline Drawings

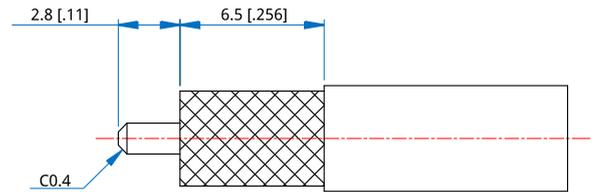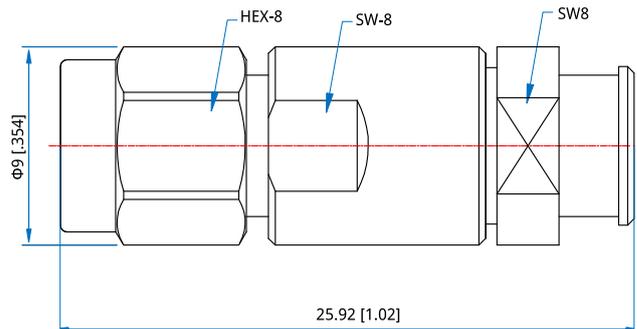

Unit: mm [in]  
Tolerance:  $\pm 0.2$ mm [ $\pm 0.008$ in]

