

# NCM-MRB-086-2

## MCX Male Right Angle

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency: DC~6GHz  
VSWR: 1.25 max.  
Impedance: 50Ω

### Mechanical



RF Connector: MCX male Right Angle  
Mating Cable: NH280, ND086, NE086, RG316, RG316D  
Outer Conductor: Gold plated brass/  
Gold plated beryllium copper  
Dielectric: PTFE  
Inner Conductor: Gold plated brass

### How To Order

**NCM-MRB-086-2**

Customization is available upon request.

### Outline Drawings

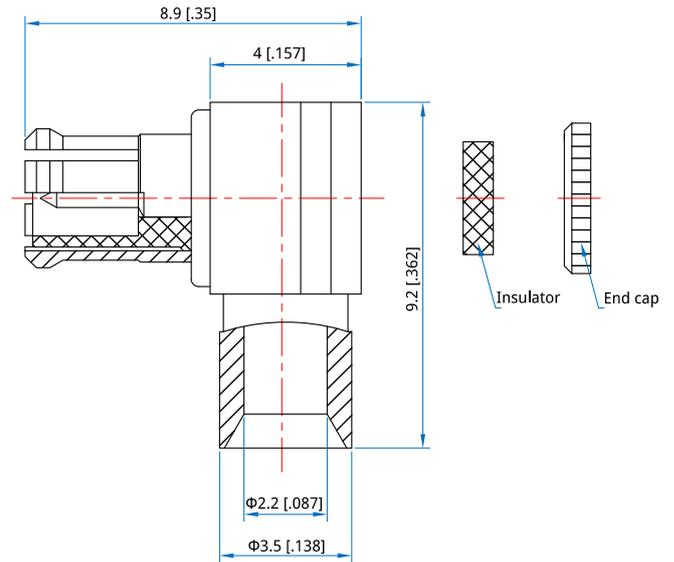

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

