

NCN-FCB-R1000-1

N Female, Crimp

Features:

* Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics




Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min
Impedance:	50Ω

Mechanical

RF Connector:	N Female
Mating Cable:	NR1000, NR1000U
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Outline Drawings

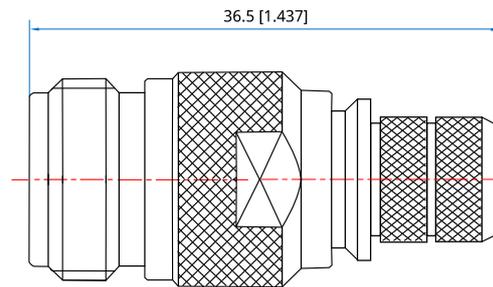

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NCN-FCB-R1000-1

Customization is available upon request.

