

# NCN-FG-A360-1

## N Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750V DC min
Impedance:	50Ω

### Mechanical



RF Connector:	N Female
Mating Cable:	NA360
Outer Conductor:	303F stainless steel
Dielectric:	PEI
Innerr Conductor:	Gold plated beryllium copper

### How To Order

**NCN-FG-A360-1**

Customization is available upon request.

### Outline Drawings

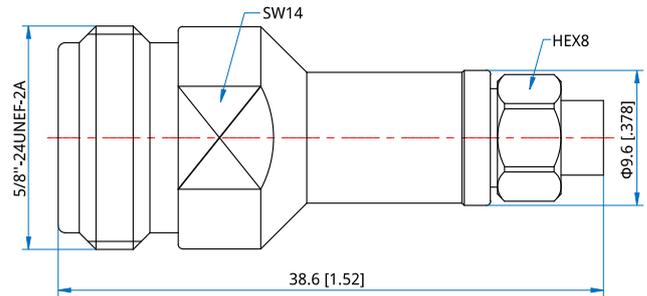

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

