

NCN-FG-A500-1

N Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω


Mechanical

RF Connector: N female
Mating Cable: NA500
Outer Conductor: Passivated Stainless Steel
Inner Conductor: Gold Plated Beryllium Copper

Environmental

Temperature: -40~+165°C


Outline Drawings

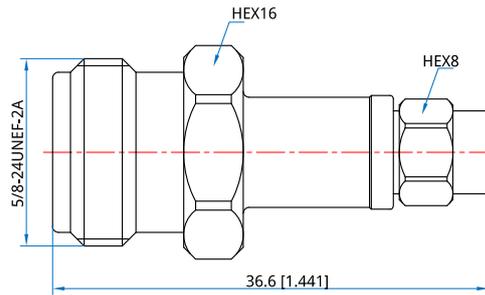

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

Stripping Reference



Unit: mm [in]

How To Order

NCN-FG-A500-1

Customization is available upon request.

