

**NCN-FG-A810-1**  
N Female

Features:  
\* Low VSWR

Applications:

- \* Radar
- \* Instruments
- \* Electronics



**Electrical**

---

Frequency:	DC~18GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min
Impedance:	50Ω

**Mechanical**


---

RF Connector:	N Female
Mating Cable:	NA760, NA810
Outer Conductor:	Stainless steel passivation
Dielectric:	PEI
Inner Conductor:	Gold plated berylliums copper

**How To Order**  
**NCN-FG-A810-1**

Customization is available upon request.

**Outline Drawings**

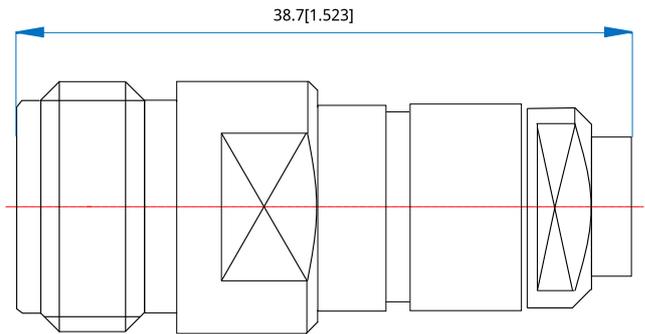

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

