

NCN-FHB-R280-2

N Female, Bulk head, Crimp

Features:

- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Instruments
- * Electronics

Electrical

Frequency:	DC~6GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V
VSWR:	1.15 max. @DC~3GHz
Impedance:	50Ω

Mechanical


RF Connector:	N Female Mating
Cable:	NR280, RG316D
Material:	Nickel plated brass
Dielectric:	PTFE
Outer:	Nickel plated brass
Inner:	Gold-plated copper
Insulator:	PTFE

Customization is available upon request.

How To Order

NCN-FHB-R280-2

Outline Drawings

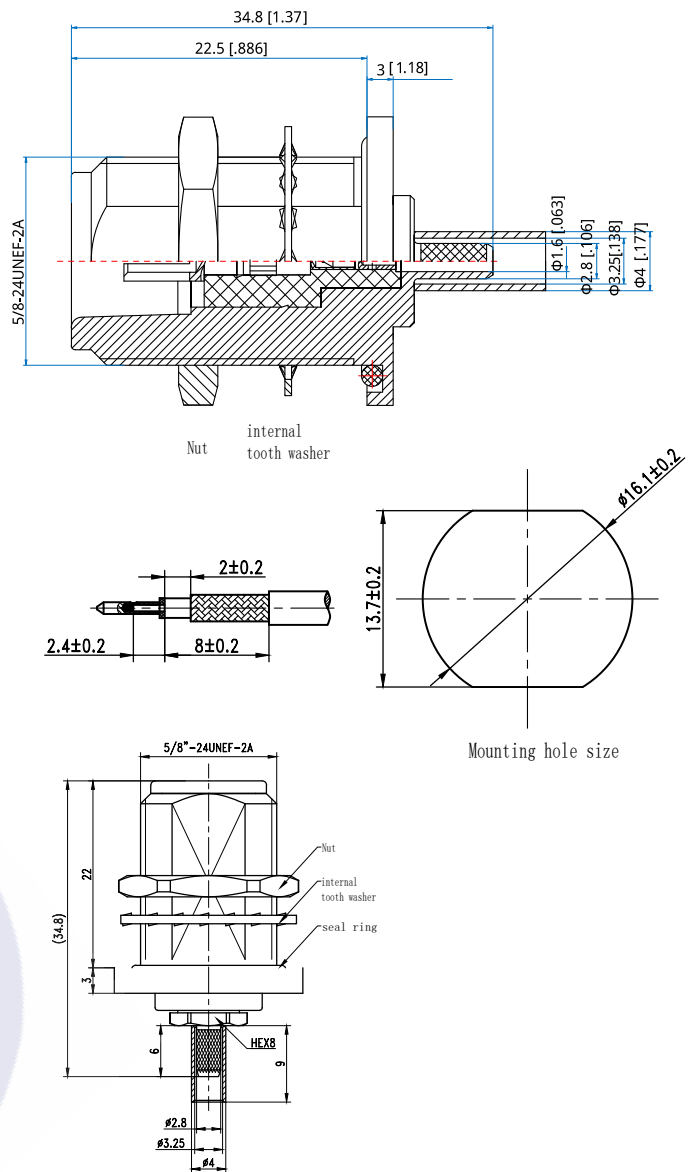

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]