

NCN-MB-R280-2

N Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V
VSWR:	1.3 max.
Impedance:	50Ω

Mechanical


RF Connector:	N Male
Mating Cable:	NR280, RG316
Outer Conductor:	Nickel plated brass
Inner Conductor:	Gold-plated brass
Insulator:	PTFE

How To Order

NCN-MB-R280-2

Customization is available upon request.

Outline Drawings

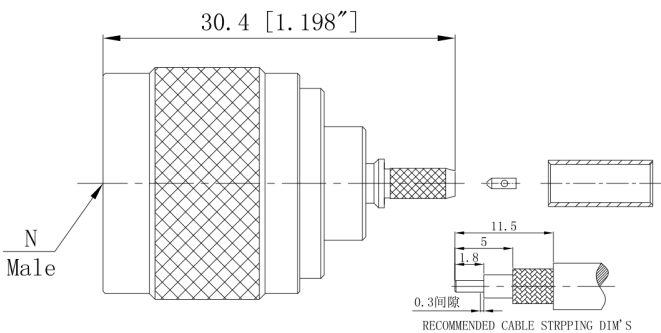

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]