

## NCN-MG-G360-1

N Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



### Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min
Impedance:	50Ω

### Mechanical



RF Connector:	N Male
Mating Cable:	NG360
Outer Conductor:	Passivated stainless steel
Dielectric:	PTFE
Innerr Conductor:	Gold plated beryllium copper

### How To Order

**NCN-MG-G360-1**

Customization is available upon request.

### Outline Drawings

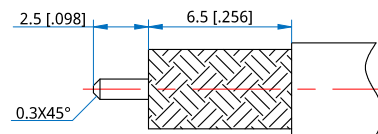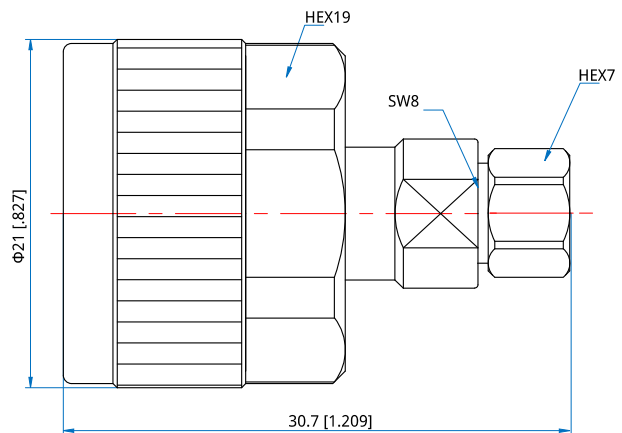

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]