

## NCS-FB-086-2

### SMA Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency: DC~26.5GHz  
VSWR: 1.25 max.

#### Mechanical

RF Connector: SMA Female  
Mating Cable: NH280, NE086, ND086, RG316  
Outer Conductor: Gold plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated Beryllium copper

#### Environmental


Temperature: -55~+165°C

#### How To Order

[NCS-FB-086-2](#)

Customization is available upon request.

#### Outline Drawings

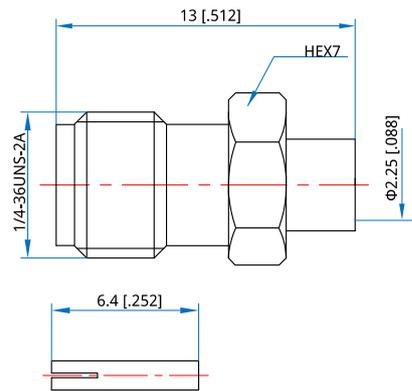

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]