


NCS-FB-141-1

SMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics




Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

Mechanical

RF Connector:	SMA Female
Mating Cable:	NH400, ND141, NE141
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated berylliums copper

Outline Drawings

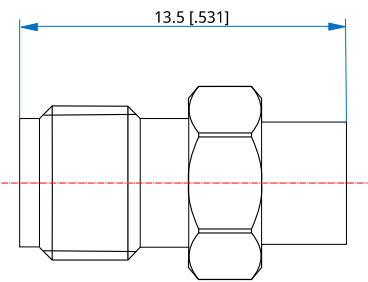

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

NCS-FB-141-1

Customization is available upon request.