

NCS-FG-A500-2 SMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.


Mechanical

RF Connector: SMA Female
Mating Cable: NA500
Outer Conductor: Passivated Stainless Steel
Inner Conductor: Gold Plated Beryllium Copper

How To Order NCS-FG-A500-2

Customization is available upon request.

Outline Drawings

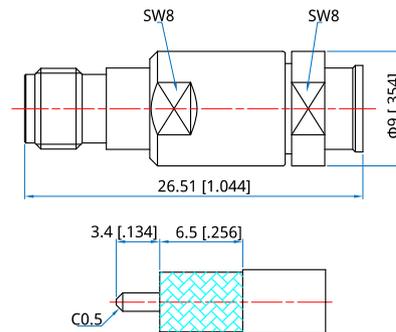

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

