

NCS-FHB-R280-2

SMA Female Bulk Head

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC-6GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V
VSWR:	1.2max.
Impedance:	50Ω

Mechanical



RF Connector:	SMA Female Bulk
Head Mating Cable:	NR280, RG316
Outer:	Gold-plated copper
Inner:	Beryllium copper gilding
Insulator:	PTFE
seal ring:	Silicone rubber(red)

How To Order


NCS-FHB-R280-2

Customization is available upon request.

Outline Drawings

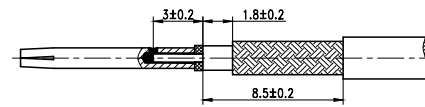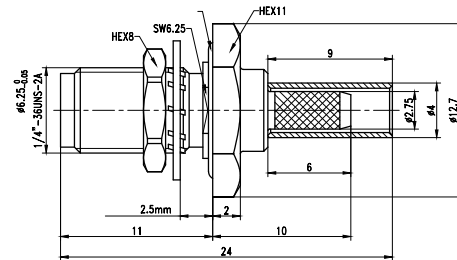

Stripping dimension



Mounting hole size

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]