

NCS-MB-R280-1

SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V
VSWR:	1.25 max.
Impedance:	50Ω

Mechanical


RF Connector:	SMA Male
Mating Cable:	NR280, RG316
Outer Conductor:	Gold Plated Copper
Dielectric:	PTFE
Inner Conductor:	Gold Plated Copper

How To Order

NCS-MB-R280-1

Customization is available upon request.

Outline Drawings

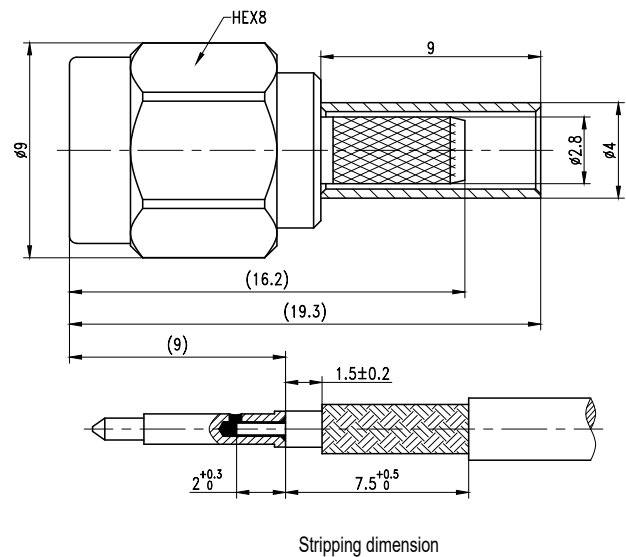

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]