

NCS-MCB-R600-2

SMA Male, Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC-6GHz
VSWR:	1.25 max.
Insertion Loss:	0.1dB typ.
Impedance:	50Ω


Mechanical

RF Connector:	SMA male
Mating Cable:	NR600
Outer Conductor:	Ternary alloy plated brass
Inner Conductor:	Gold plated brass
Dielectric:	PTFE

Environmental

Temperature:	-45~+165°C
--------------	------------

Outline Drawings

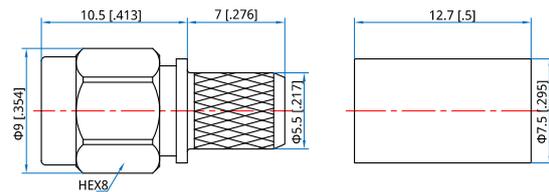

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

NCS-MCB-R600-2

Customization is available upon request.