

NCS-MG-086-3
SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~26.5GHz
VSWR: 1.25 max.


Mechanical

RF Connector: SMA male
Mating Cable: NH280, NE086, ND086, RG316
Outer Conductor: Passivated stainless steel

How To Order
NCS-MG-086-3

Customization is available upon request.

Outline Drawings

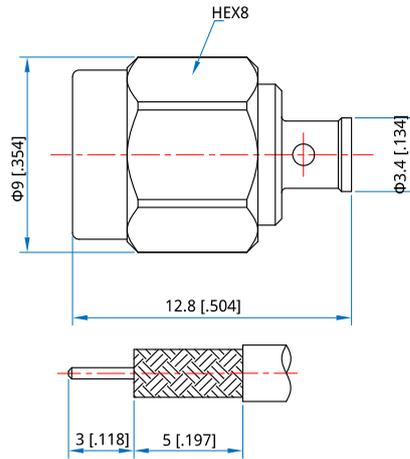

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

