

NCS-MG-A800-2

SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~18GHz
VSWR: 1.25 max.
Impedance: 50Ω

Mechanical



RF Connector: SMA Male
Mating Cable: NA800
Outer Conductor: Passivated Stainless Steel

How To Order

NCS-MG-A800-2

Customization is available upon request.

Outline Drawings

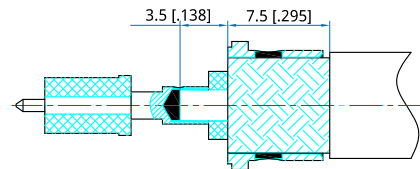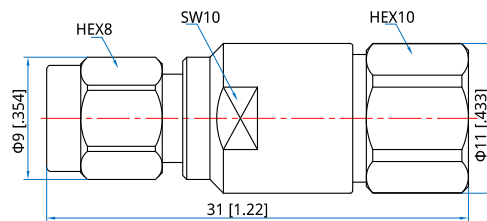

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]