

NCS-MG-A830-1
SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω


Mechanical

RF Connector:	SMA Male
Mating Cable:	NA830
Outer Conductor:	303F stainless steel

How To Order
NCS-MG-A830-1


Customization is available upon request.

Outline Drawings

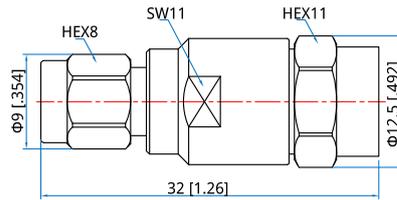

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

Stripping Reference



Unit: mm [in]
Tolerance: ±0.1mm [±0.004in]

