

NCS-MG-T50-1

SMA Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~26.5GHz
VSWR: 1.3 max.

Mechanical



RF Connector: SMA male
Mating Cable: NT50
Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated brass

How To Order

NCS-MG-T50-1

Customization is available upon request.

Outline Drawings

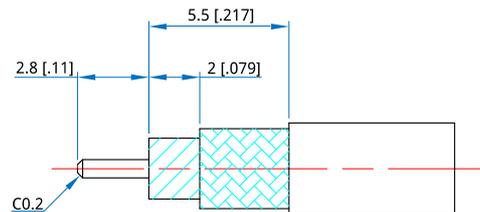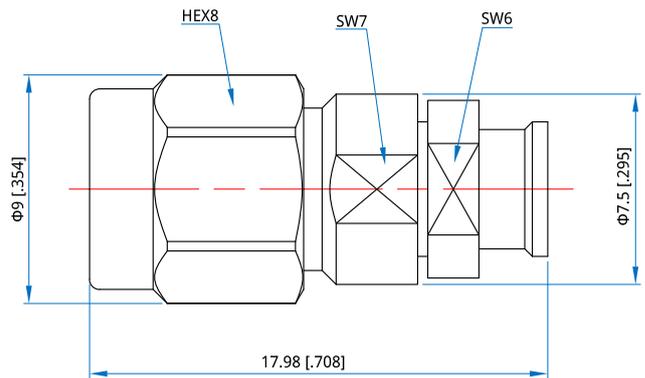

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

