

## NCS-MG-Z360-1

### SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

|                          |              |
|--------------------------|--------------|
| Frequency:               | DC~26.5GHz   |
| VSWR:                    | 1.25 max.    |
| Impedance of Dielectric: | 5000MΩ min.  |
| Voltage Withstand:       | 1000V DC min |
| Impedance:               | 50Ω          |

#### Mechanical



|                  |                      |
|------------------|----------------------|
| RF Connector:    | SMA Male             |
| Mating Cable:    | NZ360                |
| Outer Conductor: | 303F stainless steel |

#### How To Order

**NCS-MG-Z360-1**

Customization is available upon request.

#### Outline Drawings

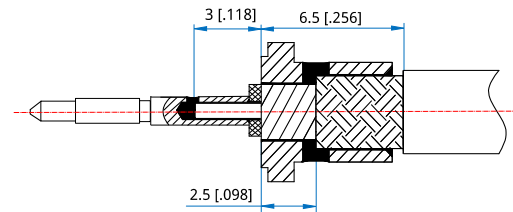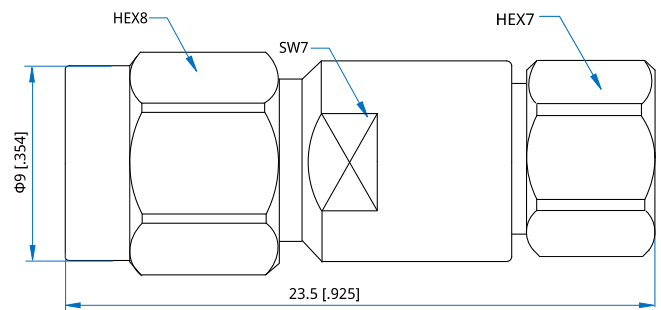

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]