

## NCS-MRCB-RG178-1

### SMA Male Right Angle, Crimp

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency:	DC~3GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC


#### Mechanical

RF Connector:	SMA male right angle
Mating Cable:	RG178
Inner Conductor:	Gold plated brass
Dielectric:	PTFE
Body:	Gold plated brass

#### Environmental

Temperature:	-40~+125°C
--------------	------------

#### Outline Drawings

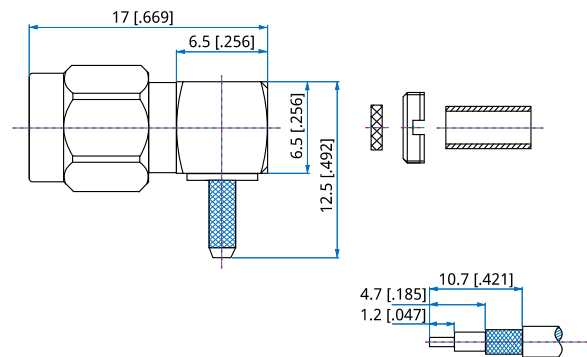

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

#### How To Order

**NCS-MRCB-RG178-1**

Customization is available upon request.