

NCS-MRG-A800-1

SMA Male Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~18GHz
VSWR: 1.35 max.
Impedance: 50Ω

Mechanical


RF Connector: SMA male right angle
Mating Cable: NA800
Outer Conductor: Passivated stainless steel
Inner Conductor: Gold plated brass or Gold plated beryllium copper

How To Order

NCS-MRG-A800-1

Customization is available upon request.

Outline Drawings

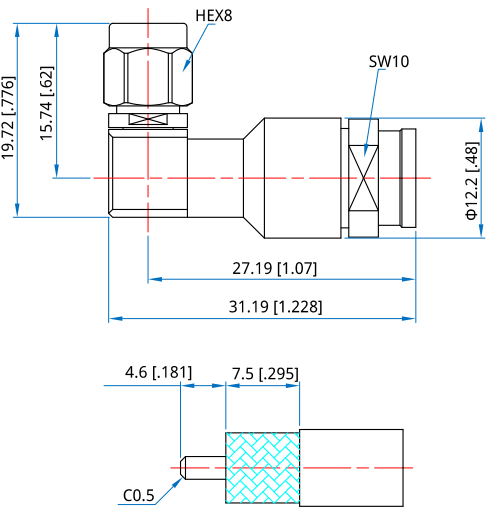

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]