

# NCT-MG-Z600-1

## TNC Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1500V DC min
Impedance:	50Ω

### Mechanical



RF Connector:	TNC Male
Mating Cable:	NZ600
Outer Conductor:	303F stainless steel

### How To Order

**NCT-MG-Z600-1**

Customization is available upon request.

### Outline Drawings

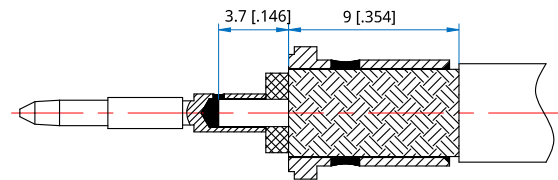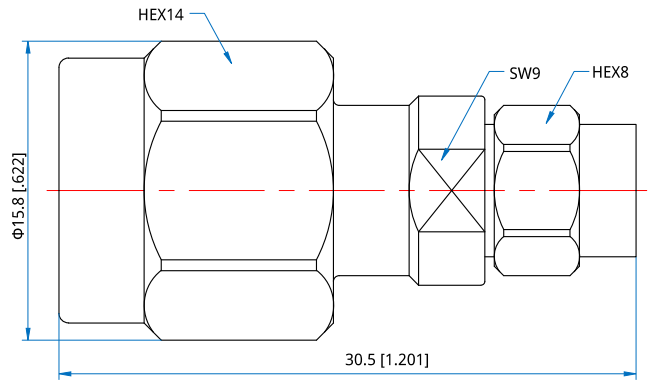

Unit: mm [in]  
Tolerance:  $\pm 0.2$ mm [ $\pm 0.008$ in]

