

NCV-FG-A220-1

1.85mm Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~67GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance:	50Ω

Mechanical



RF Connector:	1.85mm Female
Mating Cable:	NA220
Outer Conductor:	303F stainless steel

How To Order

NCV-FG-A220-1

Customization is available upon request.

Outline Drawings

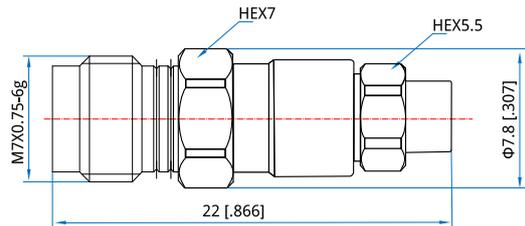

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

