

NAM0-40-U

Long Flex Life


Features:

- * Long Flex Life
- * High Durable

Applications:

- * Laboratory Test
- * Satellite Communication

Construction

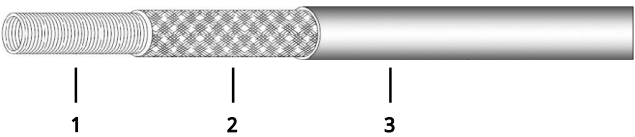

No.	Name	Size (mm)	Material
1	Spring	5.0±0.1	Stainless Steel Wire
2	Outer Conductor	5.6±0.1	Tin Plated Braid
3	Jacket	7.0±0.15	PUR

Environmental

Temperature:	-40~+80°C
Water Proof:	Yes
Oil Proof:	Yes

Mechanical

Bend Radius (installation):	30mm
Bend Radius (repeated):	80mm
Spring Spiral Direction:	Right
Spring Zero Load Pitch:	0.5mm
Spring Wire Diameter:	0.5±0.05mm
Spring Inner Diameter:	4.0±0.1mm
Outer Conductor Coverage	90% min.
Rate:	
Jacket Color:	Blue

How To Order

NAM0-40-U-X

X: Length in meters

Examples:

To order a NAM0-40-U RF cable armor, 0.5 meter, specify NAM0-40-U-0.5female, 0.5 meter, specify NE086-18-SSF-0.5.