

NE141 Low PIM

Features:

* Low PIM

Applications:

* Phased-array Radar
* Instrument
* Interconnection in and between equipment

Electrical

Frequency:	DC~26.5GHz
Cut-off Frequency:	34GHz
Impedance:	50Ω
Velocity of Propagation:	70%
Shielding Effectiveness:	165dB min.
Voltage Withstand:	500V DC


Mechanical

Bend Radius (installation):	15mm
Weight:	46g/m

Environmental

Temperature: -55~+125°C

Construction

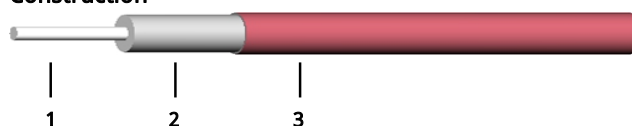

No.	Name	Size (mm)	Material
1	Inner Conductor	0.94	Silver-plated copper
2	Dielectric	2.98	PTFE
3	Outer Conductor	3.58	Ternary alloy plated seamless copper tube

Attenuation & Power Handling

Frequency (GHz)	0.3	0.5	1	3	6	10	12.4	18	26.5
Attenuation*1 (dB/100m)	20.3	26.5	38.2	69.3	102.4	137.7	156.4	195.9	249.2
Average Power*2 (W)	1020	782	542	299	203	151	133	106	83

[1] VSWR:1.0; Ambient: +25°C (77°F)

[2] VSWR:1.0; Ambient: +40°C (104°F); Sea level

Calculate Cable Attenuation: Attenuation (dB/100m) = $1.131702 * \sqrt{F \text{ (MHz)}} + 0.002450 * F \text{ (MHz)}$

Calculate Connector Attenuation: Attenuation (dB) = $0.03 * \sqrt{F \text{ (GHz)}}$

How To Order

NE141-X-Y-Z

X: Frequency in GHz

Y: Connector type

Z: Length in meters

Examples:

To order a NE141 cable assembly, DC-18GHz, SMA male to SMA female, 0.5 meter, specify NE141-18-SSF-0.5.

Connector naming rules:

3 - 3.5mm (26.5GHz, VSWR 1.3)
P - SMP (26.5GHz, VSWR 1.3)
A - SSMA (26.5GHz, VSWR 1.3)
S - SMA (26.5GHz, VSWR 1.3)
N - N (12GHz, VSWR 1.2)
X - MMCX (6GHz, VSWR 1.3)
M - MCX (6GHz, VSWR 1.3)
B - BNC (4GHz, VSWR 1.4)
D - SMB (4GHz, VSWR 1.25)

Female Connector - Add 'F' after connector name

Right Angle - Add 'R' after connector name (VSWR increase 0.1)

Mating Connector

NCK-MG-141-1

2.92mm male, Stainless steel



NCS-MG-141-3

SMA male, Stainless steel



NCS-MRB-141-4

SMA male, Right angle, Gold plated brass

NCS-MRG-141-3

SMA male, Right angle, Stainless steel

NCS-FB-141-1

SMA female, Gold plated brass



NCS-FL2B-141-1

SMA female, 2-hole flange mount, Brass

NCS-FL4B-141-1

SMA female, 4-hole flange mount, Gold-plated brass



NCS-FHB-141-1

SMA female, Bulk head, Brass

NCN-MB-141-3

N male, Nickel-plated brass



NCN-MRB-141-1

N male, Right angle, Nickel-plated brass



NCN-MRB-141-2

N male, Right angle, Gold-plated brass



NCN-FB-141-1

N female, Nickel-plated brass



NCB-MB-141-1

BNC male, Brass-plated ternary alloy



NCN-MRB-141-1

N male, Right angle, Nickel-plated brass