

NA44

4.3-10 to 4.3-10

Features:

* Low VSWR

Applications:

* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~6GHz
VSWR:	1.2 max. 1.1 max. @DC~3GHz (Outline E) 1.2 max. @3~6GHz (Outline E)
Insertion Loss:	0.1dB max. (Outline A, C, D)
Inter-modulation 3rd:	-155dBc max. (Outline A, C, D) -160dBc max. (Outline B)
Dielectric Withstanding Voltage:	1500V RMS, 50Hz, at sea level, min.
Working Voltage:	1000V RMS, 50Hz, at sea level, max.
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	1mΩ max.
Impedance of Contact (Outer):	1mΩ max.
Impedance:	50Ω

Mechanical

RF Connectors:	4.3-10
Mating Life Cycle:	500 cycles min.
Outer Conductor:	Ternary alloy plated brass Nickel plated brass (Outline E)
Dielectric:	PTFE
Inner Conductor:	Silver plated brass

Environmental

Temperature:	-45~+85°C -45~+125°C (Outline E)
--------------	-------------------------------------

How To Order

NA44-MM - 4.3-10 (m) to 4.3-10 (m), Outline A

NA44-MF - 4.3-10 (m) to 4.3-10 (f), Outline B


NA44-FF - 4.3-10 (f) to 4.3-10 (f), Outline C

NA44R-MF - 4.3-10 (m) to 4.3-10 (f) right angle, Outline D

NA44L-FF - 4.3-10 (f) to 4.3-10 (f) flange mount, Outline E

Customization is available upon request.

Outline Drawings

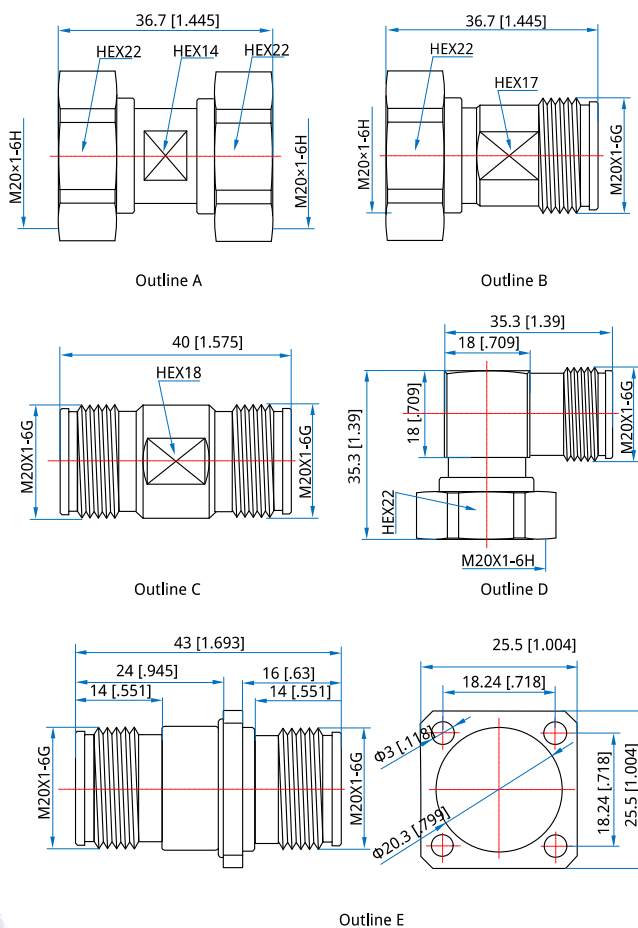

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]