

NAAN SSMA to N

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max.
Insertion Loss:	0.04dB max.
Dielectric Withstanding Voltage:	750V RMS
Impedance of Dielectric:	5000MΩ min.
Impedance:	50Ω


Mechanical

RF Connectors:	SSMA N
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated brass (Outline A) Gold plated beryllium copper

Environmental

Temperature:	-70~+165°C
--------------	------------

Outline Drawings

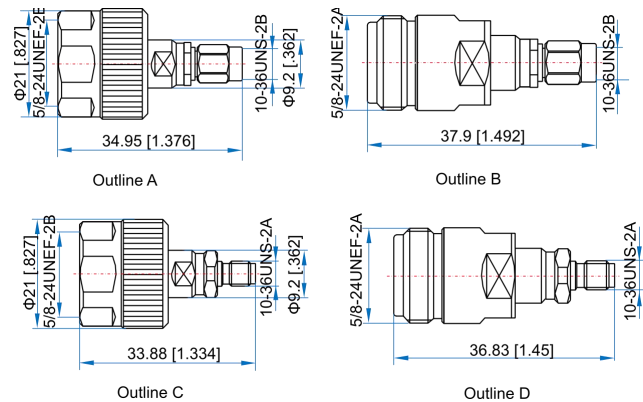

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

NAAN-MM - SSMA(m) to N(m), Outline A

NAAN-MF - SSMA(m) to N(f), Outline B

NAAN-FM - SSMA(f) to N(m), Outline C

NAAN-FF - SSMA(f) to N(f), Outline D

Customization is available upon request.