

NAAS SSMA to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	750Vrms
Insertion loss:	0.05dB max.
Impedance:	50Ω


Mechanical

RF Connectors:	SSMA SMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

Environmental

Temperature:	-60~+165°C
--------------	------------

Outline Drawings

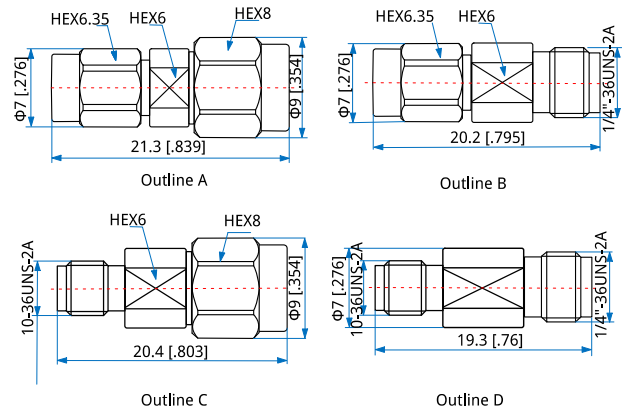

Unit: mm [in]

Tolerance: $\pm 0.5\text{mm}$ [$\pm 0.02\text{in}$]

How To Order

NAAS-MM - SSMA(m) to SMA(m), Outline A

NAAS-MF - SSMA(m) to SMA(f), Outline B

NAAS-FM - SSMA(f) to SMA(m), Outline C

NAAS-FF - SSMA(f) to SMA(f), Outline D

Customization is available upon request.