

NABB BNC to BNC

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar



Electrical

Frequency: DC~1GHz (Outline D, E)
DC~3GHz (Outline F)
DC~4GHz
VSWR: 1.15 max.
1.45 max. (Outline F)
Impedance: 50Ω

Environmental

Temperature: -55~+125°C

How To Order


NABB-MM - BNC(m) to BNC(m), Outline A
NABB-FF - BNC(f) to BNC(f), Outline B
NABB-MF - BNC(m) to BNC(f), Outline C
NABBB-FFF - BNC(f) to BNC(f) to BNC(f), Outline D
NABBB-FMF - BNC(f) to BNC(m) to BNC(f), Outline E
NABBR-MF - BNC(m) to BNC(f), Right angle, Outline F
NABBL-FF - BNC(f) to BNC(f), Flange mount, Outline G
NABBH-FF - BNC(f) to BNC(f), Bulk head, Outline H

Mechanical


RF Connectors: BNC
Mating Life Cycle: 500 cycles
Outer Conductor: Ternary alloy plated brass or nickel plated brass
Dielectric: PTFE
Inner Conductor: Gold plated beryllium copper or Gold plated phosphor copper

Customization is available upon request.


Outline Drawings




Outline A




Outline B




Outline C




Outline D




Outline E



Outline F

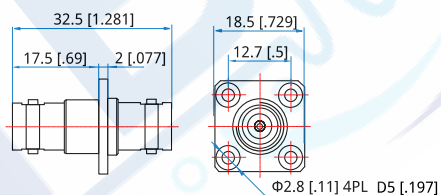

Outline G

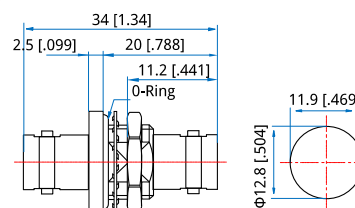

Outline H