

## NAKA 2.92mm to SSMA

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~40GHz  
VSWR: 1.2 max.  
Insertion Loss: 0.26dB max.  
Impedance: 50Ω


### Mechanical

RF Connectors: 2.92mm  
SSMA  
Mating Life Cycle: 500 cycles  
Outer Conductor: Passivated stainless steel  
Dielectric: PEI  
Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+125°C

### Outline Drawings

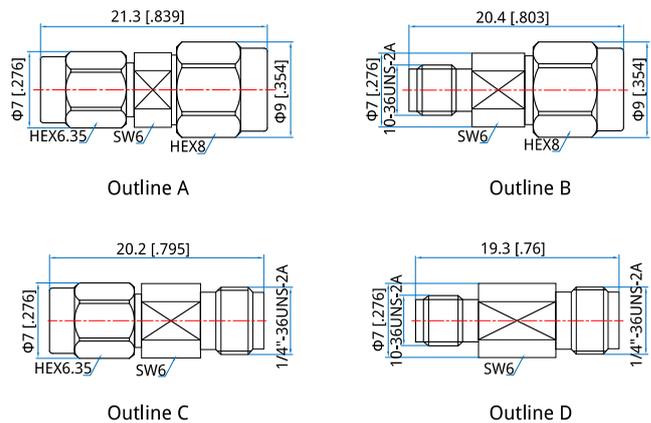

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

**NAKA-MM** - 2.92mm(m) to SSMA(m), Outline A  
**NAKA-MF** - 2.92mm(m) to SSMA(f), Outline B  
**NAKA-FM** - 2.92mm(f) to SSMA(m), Outline C  
**NAKA-FF** - 2.92mm(f) to SSMA(f), Outline D

Customization is available upon request.