

## NAKN 2.92mm to N

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar



### Electrical

Frequency: DC~18GHz  
VSWR: 1.15 max.  
Insertion Loss: 0.3dB  
Impedance: 50Ω


### Mechanical

RF Connectors: 2.92mm  
N  
Mating Life Cycle: 2000 cycles  
Outer Conductor: Passivated SUS303 Stainless Steel  
Dielectric: PEI  
Inner Conductor: Gold Plated Beryllium Copper

### Environmental

Temperature: -55~+125°C

### Outline Drawings

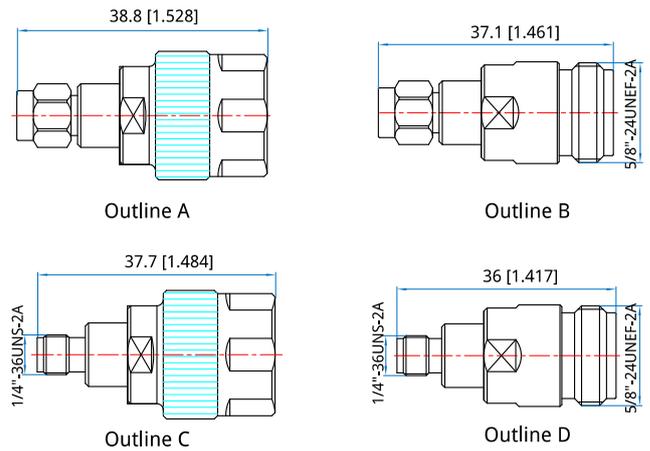

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

- NAKN-MM** - 2.92mm(m) to N(m), Outline A
- NAKN-MF** - 2.92mm(m) to N(f), Outline B
- NAKN-FM** - 2.92mm(f) to N(m), Outline C
- NAKN-FF** - 2.92mm(f) to N(f), Outline D

Customization is available upon request.