

NAKS

2.92mm to SMA

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~27GHz
VSWR: 1.15 max.
Impedance: 50Ω

Mechanical


RF Connectors: 2.92mm SMA
Outer Conductor: Polished & Passivated SUS303F Stainless Steel
Dielectric: PEI & PTFE
Inner Conductor: Gold Plated Beryllium Copper

How To Order

- NAKS-FF** - 2.92mm(f) to S(f), Outline A
- NAKS-MM** - 2.92mm(m) to S(m), Outline B
- NAKS-MF** - 2.92mm(m) to S(f), Outline C
- NAKS-FM** - 2.92mm(f) to S(m), Outline D

Customization is available upon request.

Outline Drawings

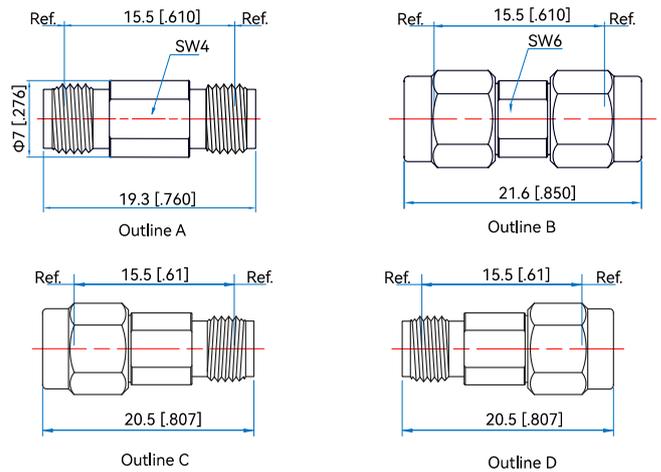

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

