

NAM1M1

NMD 1.0mm to NMD 1.0mm

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~110GHz
VSWR:	1.35 max.
Impedance:	50Ω

Mechanical

RF Connectors:	NMD 1.0mm
Mating Life Cycle:	500 cycles min.
Outer Conductor:	Gold plated beryllium copper & Passivated SUS303 stainless steel
Dielectric:	CPS
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+85°C
--------------	-----------

How To Order




NAM1M1-MM - NMD 1.0mm (m) to NMD 1.0mm (m), Outline A

NAM1M1-FF - NMD 1.0mm (f) to NMD 1.0mm (f), Outline B

NAM1M1-FM - NMD 1.0mm(f) to NMD 1.0mm(m), Outline C

Customization is available upon request.

Outline Drawings

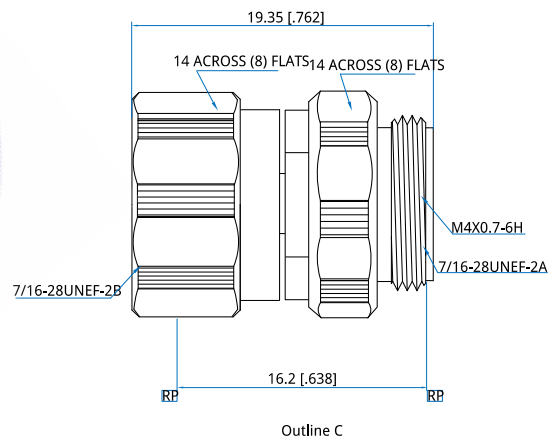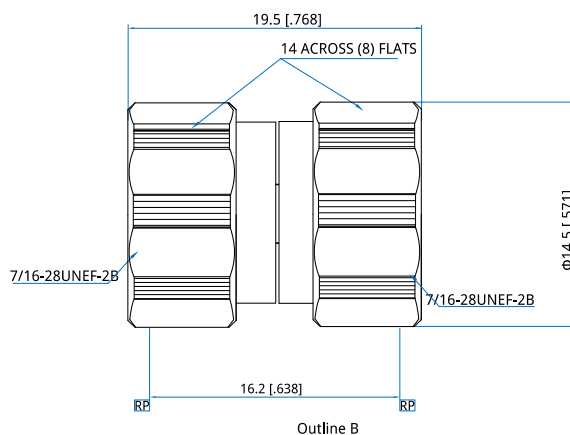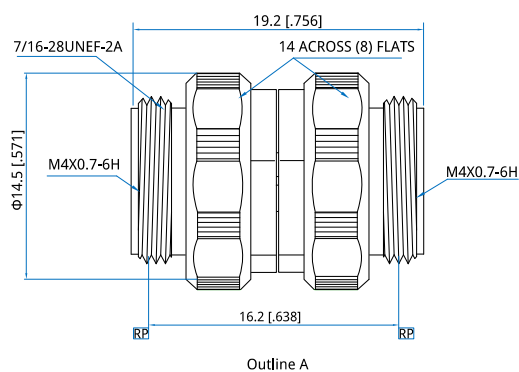

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]