

## NAM2M3

NMD 2.4mm to NMD 3.5mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~26.5GHz  
VSWR: 1.15 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: NMD 2.4mm  
NMD 3.5mm  
Mating Life Cycle: 2000 cycles max.  
Outer Conductor: Passivated SUS303 stainless steel  
Dielectric: PEEK  
Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

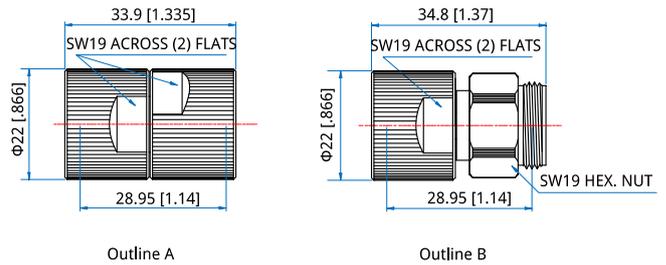

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

### How To Order

**NAM2M3-FF** - NMD 2.4mm(f) to NMD 3.5mm(f), Outline A

**NAM2M3-FM** - NMD 2.4mm(f) to NMD 3.5mm(m), Outline B

Customization is available upon request.