

## NAMKJ

NMD 2.92mm to 7mm

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: DC~18GHz  
VSWR: 1.15 max.  
Impedance: 50Ω


### Mechanical

RF Connectors: NMD 2.92mm  
7mm  
Mating Life Cycle: 2000 cycles min.  
Outer Conductor: Passivated SUS303 stainless steel  
Dielectric: PEI  
Inner Conductor: Gold plated beryllium copper

### Environmental

Temperature: -55~+165°C

### Outline Drawings

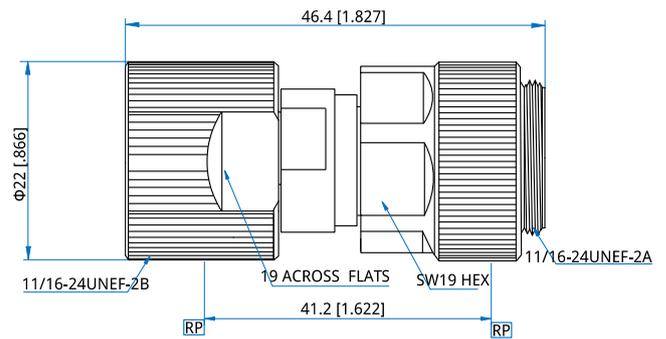

Outline A

Unit: mm [in]

Tolerance:  $\pm 0.2$ mm [ $\pm 0.008$ in]

### How To Order

**NAMKJ-F** - NMD 2.92mm (f) to 7mm, Outline A

Customization is available upon request.