

## NAMV2

NMD 1.85mm to 2.4mm

**Features:**

\* Low VSWR

**Applications:**

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

**Electrical**

---

Frequency: DC~50GHz  
 VSWR: 1.25 max.  
 Impedance: 50Ω

**Mechanical**

---


RF Connectors: NMD 1.85mm  
 2.4mm  
 Mating Life Cycle: 500 cycles  
 Outer Conductor: Passivated stainless steel  
 Dielectric: PEI  
 Inner Conductor: Gold plated beryllium copper

**Environmental**

---

Temperature: -55~+165°C

**Outline Drawings**

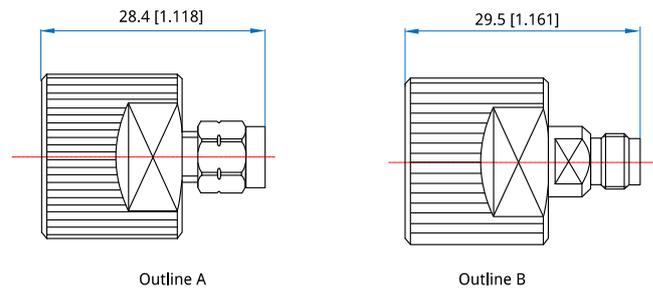

Unit: mm [in]  
 Tolerance: ±0.2mm [±0.008in]

**How To Order**

**NAMV2-FM** - NMD 1.85mm(f) to 2.4mm(m), Outline A

**NAMV2-FF** - NMD 1.85mm(f) to 2.4mm(f), Outline B

Customization is available upon request.

